
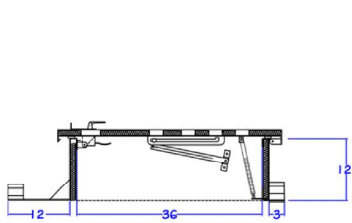




# ROOF ACCESS HATCH

## SPECIFICATIONS



- Fully Welded & Assembled Curb 14 GA G90 Steel, 0.080" Aluminum, or Stainless Steel
- Base options include self flashing, curb mount and metal building
- 1" Rigid Insulation R7.2 in lid and base or 2" Insulation option
- Full perimeter EPDM bulb gaskets
- Lids rated for a 40 PSF live load
- Inside Handle to assist closing
- Hinges and latches 12 GA galvanized steel
- Padlock Hasp
- Inside and outside manual releases
- High performance gas springs
- Hold open arm with vinyl grip
- Ladder Safety Post Option
- OSHA Compliant Safety Rail Option
- Custom Color Powdercoat Option
- Skylight Option

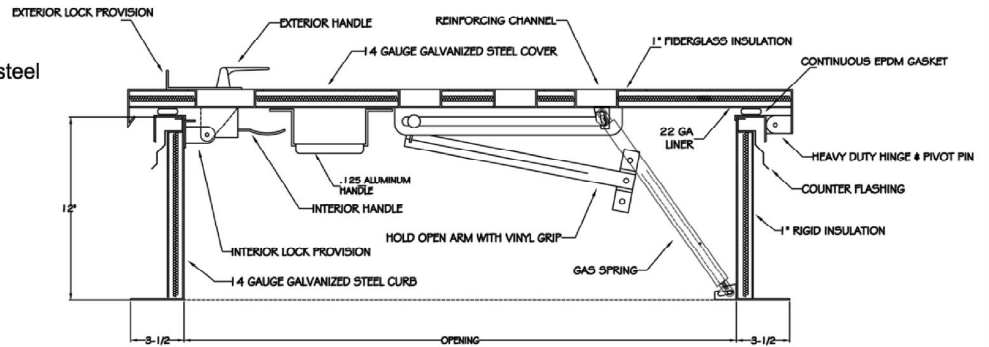



STANDING SEAM BASE OPTION





R PANEL BASE OPTION

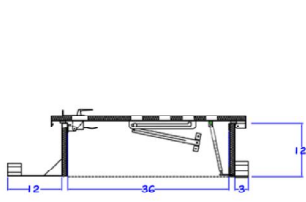


SEAM CLIP BASE OPTION

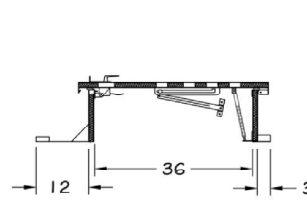

LAYOVER BASE OPTION

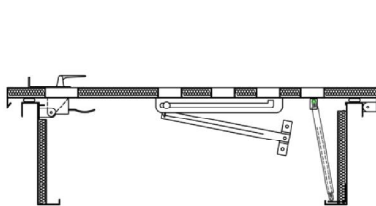

INTERNAL FLANGE BASE OPTION



MODEL SIZE

MODEL	SIZE
3030	30" x 30"
3036	30" x 36"
3048	30" x 48"
3054	30" x 54"
3096	30" x 96"
3636	36" x 36"
4242	42" x 42"
4848	48" x 48"



**R&S Manufacturing and Sales**  
 www.RnSsales.com  
 sales@RnSsales.com  
 805-375-3980 Fax 805-375-3981

CUSTOMER

JOB NAME

ARCHITECT

QUANTITY

MODEL

DATE