

SPECIFICATIONS

* Minimum 0.162" Galvanized Steel Wire

* Maximum 4" x 4" Openings

* OSHA Compliant to CFR 1910.23 and 1926.501

INSTALLATION - SKYLIGHT

* Install on Curb before Mounting Curb Mount Skylight



* Skylight attached to curb using Clips 12" on center

* #10 x 3/4 Long Life Self Drilling Fastener

INSTALLATION - SMOKE VENT


* Welded to base flange of curb or attachment by others

MODEL	DIMENSION	QUANTITY
4896 Skylight	48-1/4" x 96-1/4"	
4896 Smoke Vent	47-1/2" x 95-1/2"	

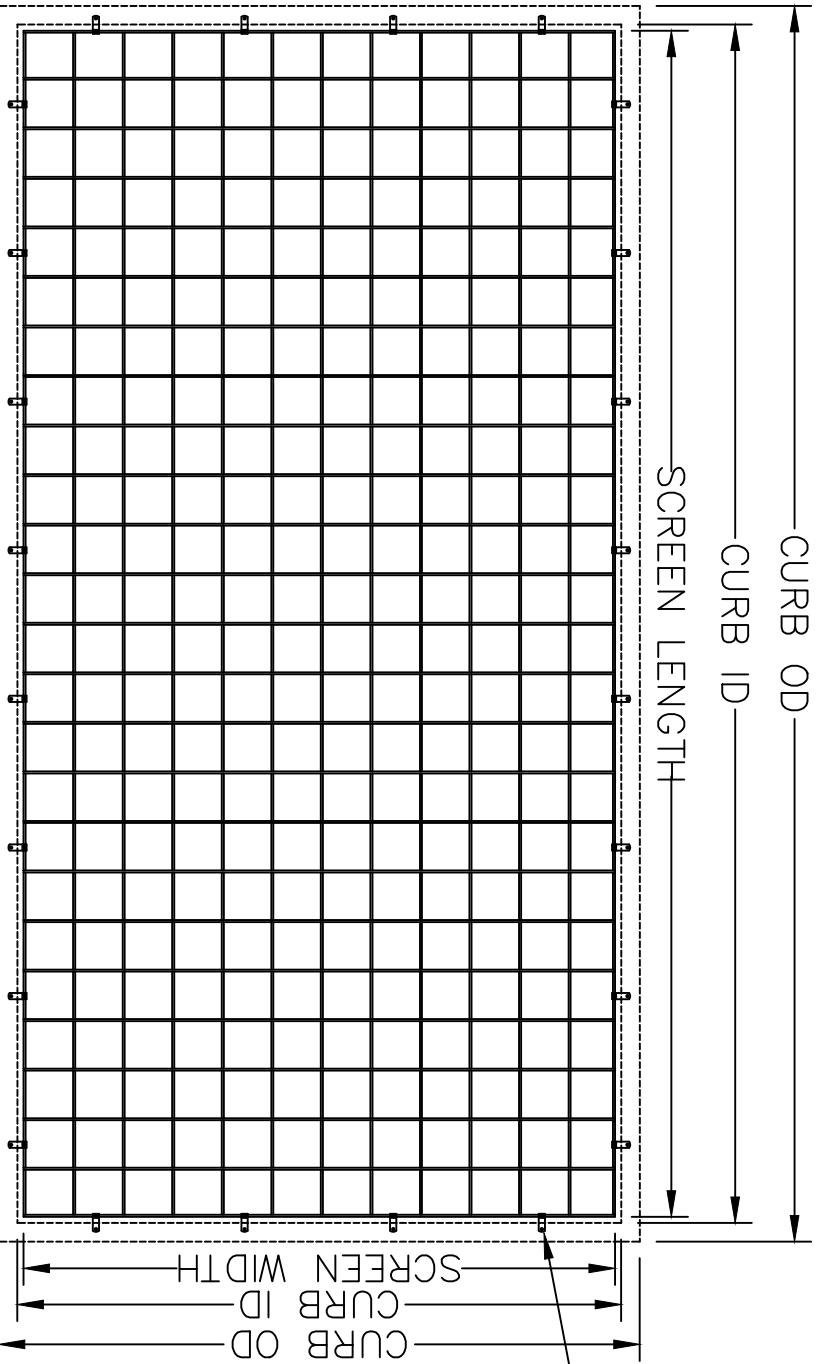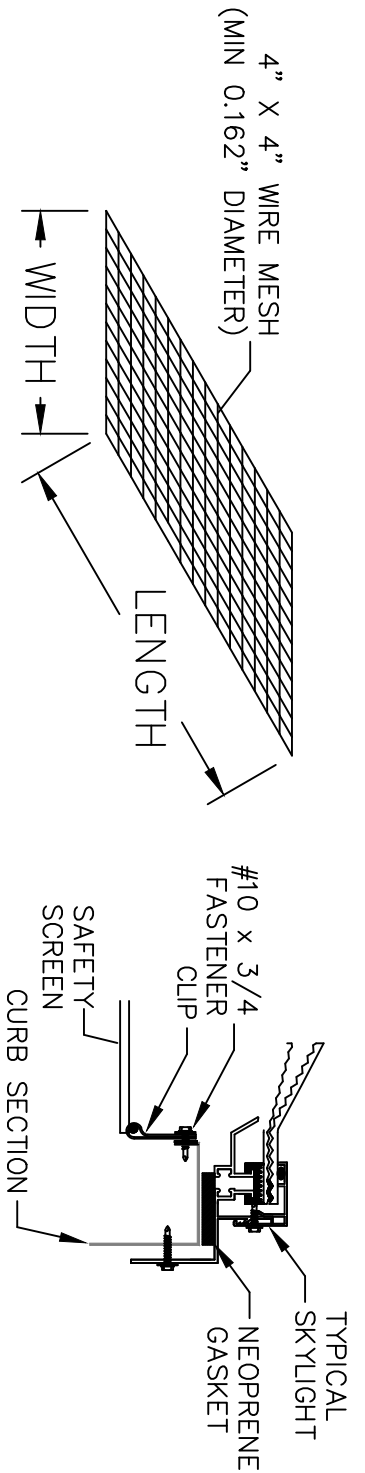

SAFETY SCREEN CLIPS
AND FASTENERS

INSTALLED 24" O.C.
#10 X 3/4" LONG LIFE
SELF DRILLERS



**R & S MANUFACTURING
AND SALES CO., INC**
3575 Old Conejo Rd.
Newbury Park, CA 91320
(805)375-3980fax 375-3981
www.RnSales.com

CUSTOMER:	JOB NAME:
Sample Fall Protection	Sample Fall Protection
DATE:	DWG #:
11/10/16	111016