
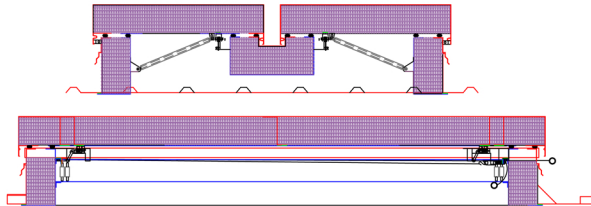
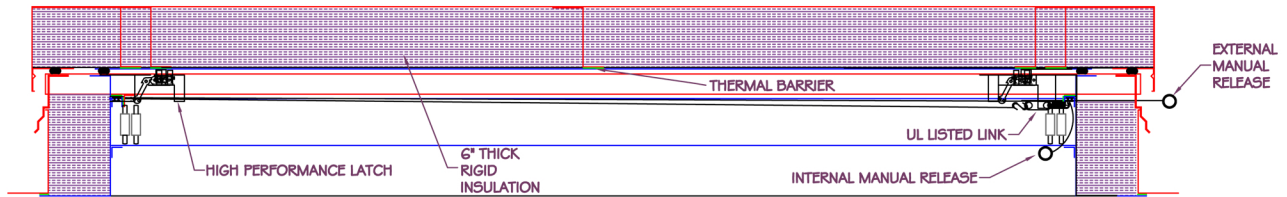



SOLID LID - HIGH R (COLD STORAGE)

SPECIFICATIONS


- Fully Welded & Assembled Curb 14/18 GA G90 Steel or Aluminum
- Base options include self flashing, curb mount and metal building
- 6" Rigid Insulation R43 with thermally broken system
- Full perimeter double sets of EPDM bulb gaskets with thermal breaks
- Lids open against a 10 PSF live load
- Lid uplift rating 30 PSF
- Hinges and latches 12 GA galvanized steel
- Latches rated for 90 PSF uplift
- UL listed fusible or McCabe resettable links
- Inside and outside manual releases
- High performance gas springs with hold open

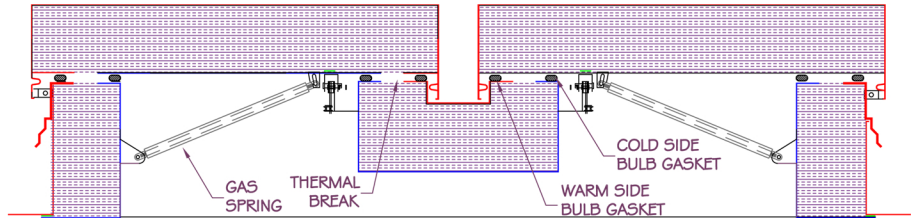


METAL BUILDING
HIGH RIB LAYOVER BASE

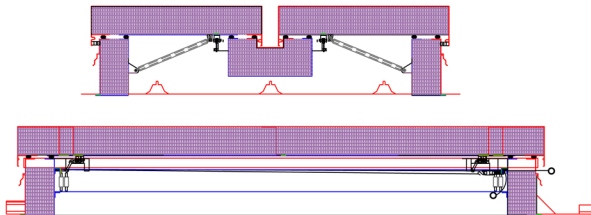

METAL BUILDING
STANDING SEAM BASE

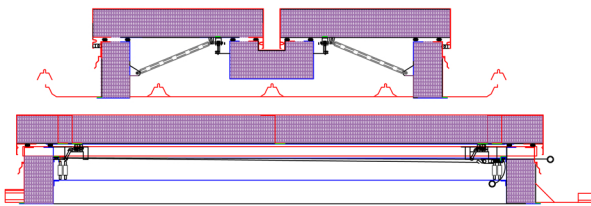

METAL BUILDING
SEAM CLIP BASE

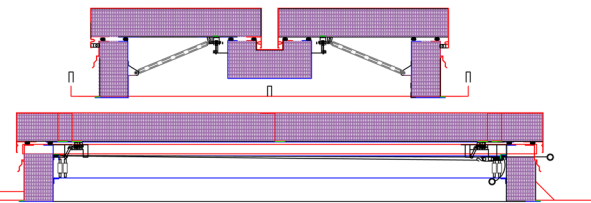

METAL BUILDING
BATTEN SEAM CLIP

MODEL	SIZE
6060	60" x 60"
6072	60" x 72"
6090	60" x 90"
6096	60" x 96"



R&S Manufacturing and Sales
 www.RnSsales.com
 sales@RnSsales.com
 805-375-3980 Fax 805-375-3981

CUSTOMER

JOB NAME

ARCHITECT

QUANTITY

MODEL

DATE