



INSTALLATION: LOOSE CONTOURS AT DOWNSLOPE
 INTERNALLY FLANGED ROOF CURB
 HIGH-RIB / R-PANEL SCREW DOWN ROOF

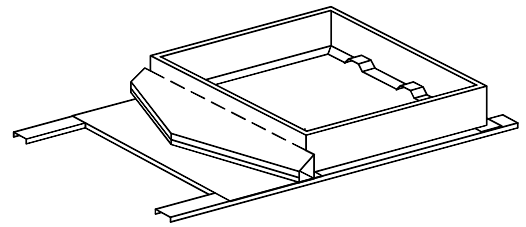


DOWNSLOPE LOOSE CONTOUR FOR IF CURB ON
 VERTICAL STANDING SEAM ROOF.

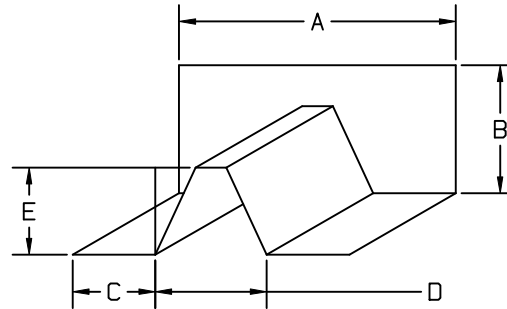


1. REMOVE INSULATION TO ACCESS INNER CURB WALL. MARK / NOTCH CURB WALL & BOTTOM FLANGE AT SEAM LOCATIONS.

2. INSTALL ROOF CURB PER THE R&S ROOF CURB INSTALLATION GUIDE.

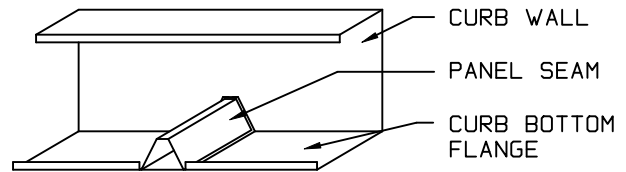


3. PREPARE LOOSE CONTOURS BY APPLYING MASTIC TAPE ON THE BACK-PLATE AND BOTTOM-PLATE.

4. APPLY BEAD OF POLYURATHANE SEALANT ON MASTIC TAPE.

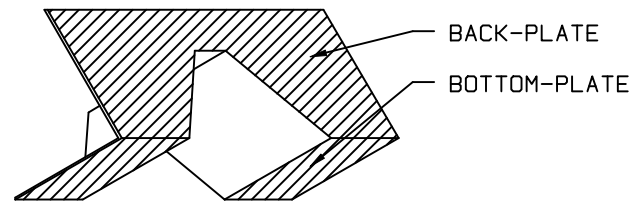


5. APPLY MASTIC AT THE HIGH RIB WHERE DOWNSLOPE LOOSE CONTOUR INSTALLS (APPROXIMATELY 3" FROM CURB WALL)

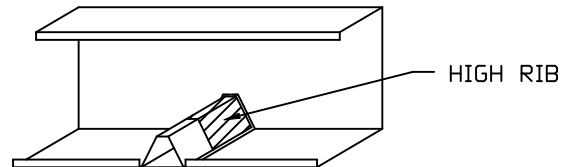

6. PRESS LOOSE CONTOUR INTO PLACE WITH BACK-PLATE FLUSH WITH INTERIOR CURB WALL AND BOTTOM-PLATE FLUSH WITH CURB BOTTOM FLANGE.

7. SECURE WITH SELF-DRILLING FASTENERS AROUND PERIMETER AT APPROXIMATELY 1" O.C. SPACING (BACK-PLATE FASTENERS FROM EXTERIOR OF CURB WALL).

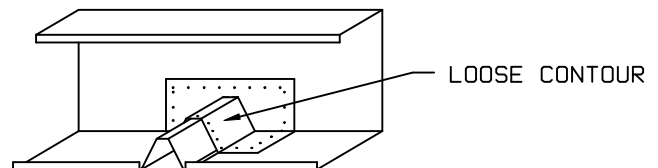

8. REPLACE INSULATION IN CURB WALL

R&S MANUFACTURING AND SALES CO. 3575 OLD CONEJO ROAD NEWBURY PARK, CA 91320 805.375.3980 SALES@RNSSALES.COM www.RSRRoofProducts.com	DESCRIPTION	DIM A	DIM B
	DOWNDSLOPE LOOSE CAP INSTALL		
	PANEL MAKE / MODEL	DIM C	DIM D
		3"	
CURB TYPE	DIM E		DRAWING DATE
INTERNALLY FLANGED CURB			04/18/19